




The UK's most popular solution to the tying-in of new walls to existing masonry walls/columns. The only system with "snap out" ties which can be positioned anywhere along the channel for a universal fit. The C2K Crocodile Wall Starter is a quality engineered wall connector system that has been developed for use with most brick and block modules. This system has been designed for multi-purpose use where reliability and durability are important requirements. It provides lateral support to masonry wall panels in conversion, extension and new building work.

[C2K Agreement Certificate](#)

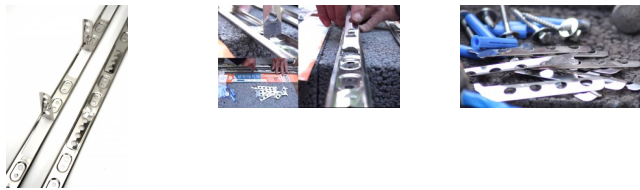

## FEATURES

### Material

- Stainless Steel Profiles: Austenitic stainless steel.
- Mild Steel Profiles: Pre-galvanised mild steel.
- Coach Screws: M6 x 50mm
- Masonry Plugs: High density polythene.

## APPLICATIONS

### C2K

References	Materials	No. of Fixings	Connector Width [mm]	Total Length [mm]	New Wall Thickness [mm]
C2KG	Galvanised	6	33	2236	60 - 250
C2KS	Stainless Steel	6	33	2236	60 - 250

## INSTALLATION

### Installation

- Use all specified fasteners.
- Fasteners must be spaced evenly, unless otherwise specified, and installed into the bricks or block and not into mortar joints.
- Insert wall ties provided at maximum 300mm centres, bedding the ties into the mortar joints.
- Detailed site work instructions are provided with each wall connector system.
- In exposed locations it may be necessary to incorporate additional protection, for example the insertion of a vertical dpc.